



## FABRICATION AND STUDY OF SLIDING WEAR BEHAVIOUR OF ALUMINUM (AA5083) WITH FLY ASH COMPOSITE MATERIAL

**Ranjeet Kumar Singh<sup>1</sup>**

*Department Of Mechanical  
MMMUT, Gorakhpur U.P. 273001  
Email:ranjeet355@gmail.com*

**Pradeep Kumar Singh<sup>2</sup>; Swati Gangwar<sup>3</sup>**

*Department of Mechanical Engineering, MMMUT,  
Gorakhpur U.P. 273001*

### **ABSTRACT**

The advancement of metal matrix composites (MMCs) is of impressive interest in industrial applications for lighter materials with more specific strength, heat resistance and stiffness. Aluminum-matrix composites (AMCs) reinforced with discontinuous or particle reinforcements are very attractive because they give the best combination of strength, ductility and toughness and they can be processed by traditional process such as rolling, extrusion, forging, and as a final process, machining. These composites provide sliding wear behavior of composites. Here composite material is fabricated by AA 5083 with fly ash (0 %, 4 %, 8%). Aim of these composites is to produce low cost composite. Fly ash is one of the solid wastes, its produced by thermal power station in large quantity. At the end, optimize the wear parameter by using Taguchi method with the use of L<sub>9</sub> orthogonal array.

**Key word;** fly-ash, metal matrix composite, aluminum, stir casting

### **I. INTRODUCTION**

Conventional monolithic materials have limitations in a good combination of strength, stiffness, toughness; ductility etc so composite material is a good choice to solve these problems. Composite materials have high strength to weight ratio and high stiffness. Now days demand of composite material increases compared to conventional monolithic materials. Composite material is used in aircraft, aerospace, automotive industry and home-made applications etc. It is possible to develop new composite material with improved mechanical and physical properties by study

fundamental nature of material and understanding their structure property relationship.

Metal matrix composites have good mechanical properties such as tensile strength, impact strength, bending strength, hardness etc, MMCs also improve specific modulus, wear resistance, damping capacity, corrosion resistance, stiffness etc. Today, research interest produces MMCs at low cost, low density with improved mechanical and physical properties. So use of waste particles as reinforcement increases. Fly ash is one of the solid wastes which is produced by combustion of coal in power plants. Fly ash also has low density and inexpensive reinforced particles. Fly ash in aluminum alloy reduces the cost of aluminum products. Today, 1600 engineering materials are available in the market, more than 200 are composites, showing the importance of composite materials as engineering materials [1].

### **II. MATRIX MATERIAL**

In the present work, Aluminum alloy (AA 5083) is chosen as a matrix material. It finds many applications such as shipbuilding, rail cars, vehicle bodies, pressure vessels, welded structures, drilling rigs. AA 5083 is an excellent ductile and thermal conductivity material. Chemical compositions are AA 5083 given below table.

**Table 1** Chemical composition of AA 5083 alloy [1]

S/N	CHEMICAL ELEMENT	% (WEIGHT %)
1.	Aluminum	Balance
2.	Magnesium	4 to 4.9
3.	Iron	0.40 max
4.	Silicon	0.0 to 0.4
5.	Zinc	0.0 to 0.10
6.	Titanium	0.05 to 0.25
7.	Other	0.05 to 0.50

AA5083 alloy know as also Mg-Al alloy. Density of aluminum alloy is  $2.66 \text{ g/cm}^3$ . This alloy withstand at low temperature without loss of property. Above  $65^\circ\text{C}$  its lose their property.

### 1. REINFORCEMENT MATERIAL

Fly ash produces by combustion of coal in thermal power station (**NTPC BADARPUR, DELHI**) use as reinforce material. Chemical composition of fly ash is finding out by **EDAX**. Low cost and low density fly ash produce light weight and low cost composites. Fly ash contains physical property such as low density, high electrical resistivity and low thermal conductivity. In power thermal station, fly ash come out with flue gas and collected through electro-static precipitator. **fly ash also known as ESP ash or dry ash**. Size of fly ash is 0 to 100 micron. Thermal power station is also produce **bottom ash** and pond **ash/mound ash**. Pond ash is mixture of fly ash and bottom ash. Density of fly ash is  $2.17 \text{ g/cm}^3$ .

### 2. FABRICATION METHOD

The aluminum alloy (AA 5083) based metal matrix composites were designed as per given table (Table 2), amounting to 100% by weights and prepared using Stir casting technique. Stir casting is a liquid state fabrication technique; in which dispersed phase Parameters affect the properties of material by erosion wear, like weight loss, decreased efficiency of component, decreased life of component etc, so the different parameters which effect on sliding wear

(Fly ash) is mixed with AA5083 alloy (melting temperature of  $750^\circ\text{C}$  achieved using muffle furnace and graphite crucibles) by manual stirring for 2-3 minute. The mixture is then poured into a permanent mold and allows cooling to room temperature. Thereafter, specimens were cut as per standard size for characterizing physical, mechanical and sliding wear.

**Table 2** Design of fabricated composite (fly ash particle with AA 5083)

SET NO	AA 5083 (wt %)	FLY ASH (wt %)
SET 1	100	0
SET 2	96	4
SET 3	92	8



**Figure 1** fabricate metal matrix composite plate

### 3. SLIDING WEAR CHARACTERISTIC OF COMPOSITE

Sliding wear is defined as a progressive loss of material occurs from a solid surface owing to a mechanical interaction between the surfaces. Materials that exhibit high wear resistance can increase machinery efficiency by maintaining design tolerance longer than unreinforced materials. For example alumina –reinforced aluminum used as automotive engine pistons results in increased power output together with longer component life. like sliding velocity and load on composites are discussed.




#### 4. INFLUENCE OF VELOCITY ON SLIDING WEAR RATE


In the material the sliding wear should be occurred as minimum as possible because if it will high then the life and efficiency of the material will decreases, so from the research it found that sliding wear reduced when velocity decrease.

**Table 3** sliding wear rate at different velocity and different filler content (load 15 N and time 16 min)

Sliding velocity (m/sec)	1.047	2.094	3.140
Sliding wear rate at 0%	$100 \times 10^{-11}$	$474.96 \times 10^{-11}$	$816.72 \times 10^{-11}$
Sliding wear rate at 4%	$75.658 \times 10^{-11}$	$226.95 \times 10^{-11}$	$269.96 \times 10^{-11}$
Sliding wear rate at 8%	$51.04 \times 10^{-11}$	$140.34 \times 10^{-11}$	$272.99 \times 10^{-11}$

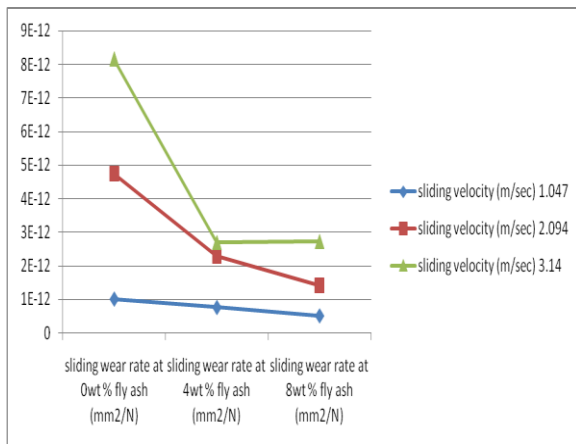

**Figure 2** sliding wear load at different velocity ( load 15 N and time 16 min)

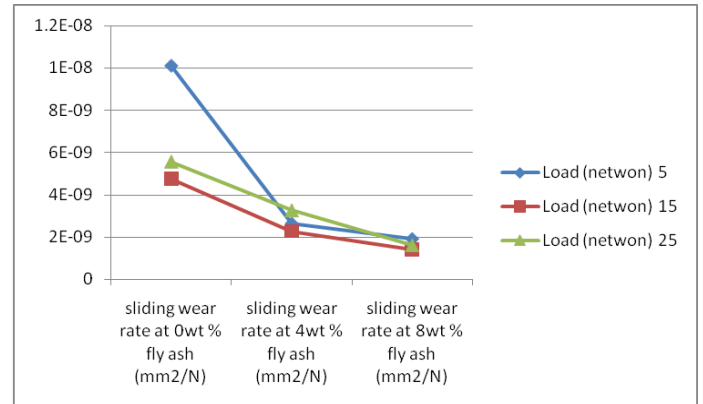

**Figure 3** sliding wear load at different load ( velocity 2.094 and time 16 min)

From above table, sliding wear rate is minimum when sliding velocity 1.047 m/sec, filler content 8%, load 15 N and time 960 sec.

#### 5. INFLUENCE OF LOAD ON SLIDING WEAR RATE

**Table4** sliding wear rate at different load and different filler content (velocity 2.094 m/sec and time 16 min)


	5	15	25
Sliding wear rate at 0%	$1012.5 \times 10^{-11}$	$474.96 \times 10^{-11}$	$555.01 \times 10^{-11}$
Sliding wear rate at 4%	$264.8 \times 10^{-11}$	$226.95 \times 10^{-11}$	$325.32 \times 10^{-11}$
Sliding wear rate at 8%	$191.4 \times 10^{-11}$	$140.34 \times 10^{-11}$	$160.77 \times 10^{-11}$

For above table sliding wear rate decrease up to 15 N and after that it is increase. Sliding wear rate is minimum at 15 N load and 8% filler material (velocity is 2.094 m/sec and time period is 960 sec).



**OPTIMIZATION OF SLIDING WEAR RATE USING TAGUCHI METHOD**

S. N	Sliding velocity (m/sec)	Filler content (%)	Load (N)	Sliding wear rate (mm <sup>2</sup> /N)	SNR A	MEAN
1	1.047	0	5	75	-37.5012	75.00
2	1.047	4	15	25.21	-28.0315	25.21
3	1.047	8	25	38.29	-31.6617	38.29
4	2.094	0	15	475.01	-53.5341	475.01
5	2.094	4	25	325.33	-50.2465	325.33
6	2.094	8	5	459.36	-53.2431	459.36
7	3.140	0	25	37.51	-31.4829	37.51
8	3.140	4	5	113.52	-41.1014	113.52
9	3.140	8	15	25.52	-28.1376	25.52

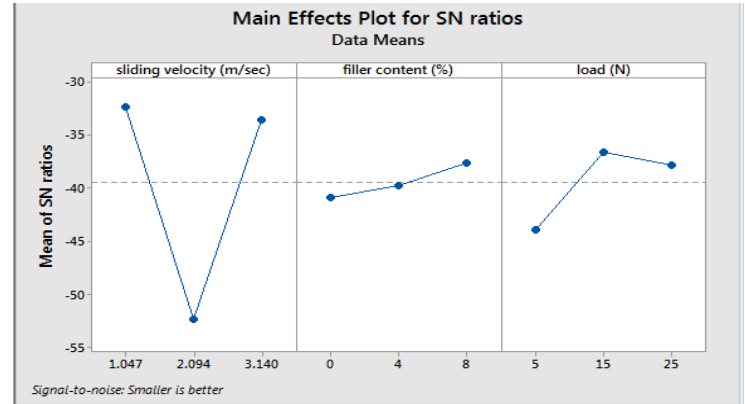


Sliding wear rate is minimum when sliding velocity is 1.047m/sec, filler content is 8% and load apply is 15 N.

**III. RESULT**


Table 3 and Table 4 show sliding wear rate is minimum when load apply 15 N, sliding velocity 1.047 m/sec and filler content is 8%. This result is also obtaining Taguchi method with the use of L<sub>9</sub> orthogonal array.

**IV. SEM ANALYSIS ON SLIDING WEAR**


**Before sliding wear      After sliding wear**

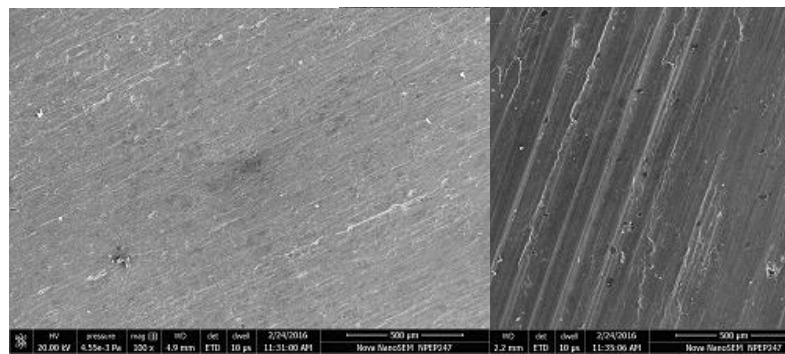

owt% of fly ash

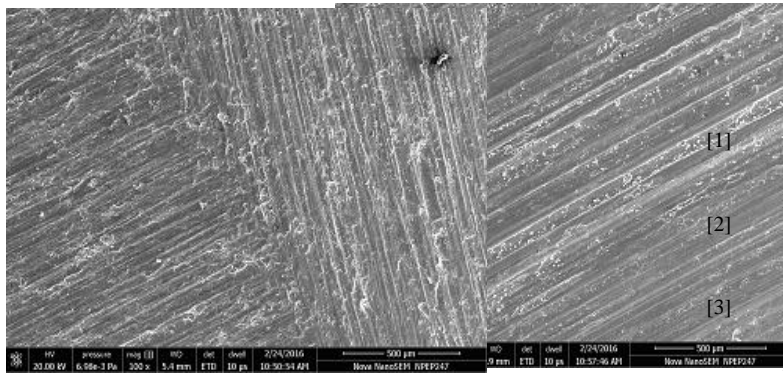

4wt% of fly ash

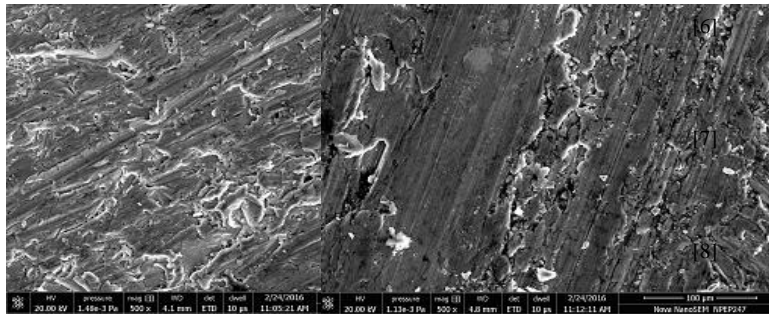

8wt% of fly ash

**Figure 4** SEM graph for different wt% of fly ash before and after sliding wear where load (15N) and time (16 min) and sliding velocity 2.094 m/sec.

### V. CONCLUSIONS

Stir casting is successfully applied to develop fly ash filled metal matrix composite. The surface topography was successfully investigated by scanning microscopic analysis. This investigation clearly shows the uniform distribution of fly ash in metal matrix composite. Sliding wear reduce with increase of fly ash content in metal matrix composite.

### REFERENCES

- [1] L.M. Manocha and A.R. Bunsell, Advances in composite materials, Pergamon Press, Oxford, 1980, pp. 7-21
- [2] A. Berghezan, Non-ferrous Materials, Nucleus, 8(5) (1966) 5–11.
- [3] S. Suresh, A. Mortensen, A. Needleman, Fundamentals of Metal-Matrix composites, Butterworth-Heinemann, Boston, 1993.
- [4] M. Taya, R.J Arsenault, Metal Matrix Composite thermo mechanical behavior, Pergamon press, Oxford, 1989.
- [5] A. Sharma, S. Das, Study of age hardening behavior of Al-4.5 wt% Cu/zircon sand composite in different quenching media—a comparative study, Materials and Design. 30 (2009) 3900–3903
- [6] A.R. Ahamed, P. Asokan, S. Aravindan, EDM of hybrid Al-SiCp-B4Cp and Al-SiCp-Glassp MMCs, International Journal of Advanced Manufacturing Technology. 44(5-6) (2009) 520-528.
- [7] J.D. Nixon, J.D. Cawley, Oxidation Inhibition Mechanisms in coated Carbon-Carbon Composites, Journal of American Ceramic Society. 75(3) (1992) 703-708
- [8] M.V. Ravichandran, R.K Prasad, E.S. Dwarakadasa, Fracture toughness evaluation of aluminium 4% Mg-12O3 liquid-metallurgy particle composite, Journal of Materials Science Letters. 11(8) (1992) 452-456.
- [9] V. Kevorkijan, Mg AZ80/SiC composite bars fabricated by infiltration of porous ceramic preforms, Metallurgical and Materials Transactions A. 35(2) (2004) 707-715
- [10] M. Bahraini, E. Schlenther, J. Kriegesmann, T. Graule, J. Kuebler, Influence of atmosphere and carbon contamination on activated pressureless infiltration of alumina–steel Composites Part A: Applied Science and Manufacturing. 41(10) (2010) 1511-1515.